

Assembly Manual



Table of Contents



Assembly			٠.		 	 	 		 			 . 1
Mobile As	semb	lv		 	 	 	 		 			 .10

IMPORTANT EasyStand Warranty Registration FREE GIFT Upon Completion


(warranty & offer valid in the United States only)

IMPORTANT! Please complete and return within 30 days. To receive the free gift, please fill out all information. Thank You.

To register online go to easystand.com/warranty

or Scan the **QR** Code



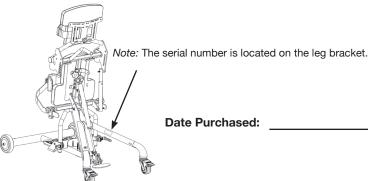

Date Purchased:

Contact Altimate Medical for any information required prior to purchase. This owner's manual along with other information is freely available by request or by downloading from easystand.com.

SYMBOL/LABEL LEGEND



CAUTION/WARNING/ATTENTION



TEMPERATURE



TYPE BF APPLIED PART



DATE OF MANUFACTURE



PINCHPOINT



SEE INSTRUCTIONS FOR USE



HUMIDITY



ATMOSPHERIC PRESSURE



SERIAL NUMBER



MANUFACTURER



CONFORMITÈ EUROPËENNE



PRESCRIPTION ONLY



MEDICAL DEVICE




POTENTIALLY HOT SURFACE

Accessible surfaces which may exceed 105°F/41°C and could be a hazard to persons with skin damage or not having sensation.



Waste of electrical and electronic equipment must not be disposed as unsorted municipal waste. It must be collected separately, and must be disposed as per local regulations. Contact your authorized representative for information concerning the decommissioning of your equipment.

CERTIFICATION LABEL/UNIQUE DEVICE IDENTIFICATION LABEL

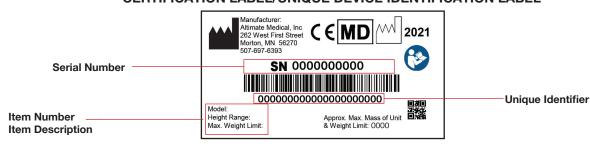

Assembly


1. Remove all parts from the box. Remove the two bolts and two coved nuts from front frame.




2. Flip up the rear frame to allow easier access to the post. Attach the front and rear frames to one another.



3. Place the two coved nuts into the bottom of the frame and flush with the tube. You may have to tap them in with a rubber hammer to make them flush.



4. Place the two bolts into the top of the frame and screw into the coved nut, making sure they are flush. Tighten securely.



- **5A.** Place the unit back in the normal position. If you ordered the optional Manual Hydraulic Actuator with Removable Handle, remove knob, bolt and spacer from center of handle. Insert spacer as shown.
- **5B.** Place bolt into the spacer as shown.





6. Place knob onto bolt and tighten securely.



7. Remove pin from the pump, place pump handle onto pump shaft as shown and place pin through holes.



8. Place top of handle on to the handle, insert 2 bolts and tighten securely.



- **9A.** If the Gas Spring Lockout was ordered, unlock the gas spring by pulling the plunger.
- **9B.** If the Gas Spring Lockout was not ordered, remove the bolt from the lower part of the cylinder on the mast as shown, discard bolt.





9. Use the optional pump handle or step on the gas spring assist pedal to raise the seat about 3/4 the way up as shown. Line up the following arm with the back angle tube.



10. Depress the spring button to allow the following arm to slide into place. Match the following arm position color with the corresponding seat depth color. Tighten the knob securely (for information on seat adjustments see the Instructions for Use Manual).



11. Loosen the ratchet handles on the foot plates and swivel into place (for information on foot plate adjustments see the Instructions for Use Manual).



- **12A.** Insert each knee bracket into the tubes onto the unit, with the clamp down.
- **12B.** Depress the spring button to allow the bracket to slide into place, advance until the spring button locks into place.

For the Swing-Away Knee Pads, insert bracket into place and tighten knobs securely.






13. Insert each knee pad bracket into the slots on the knee bracket. Tighten knobs securely.




14. Remove knob from the knee pad, leaving the plastic and rubber washer in place on the knee pad, place the knee pad and washers onto the knee pad bracket. Place knob onto bolt as shown. Repeat steps for the opposite side (for information on knee pad adjustments see the Instructions for Use Manual).



15. If you ordered the Supine option, remove the controller from the packaging. Remove the two bolts on the bottom of the controller, leaving nuts in place.




16. Place controller onto the bracket on the side of the unit. The bracket will slide into the slot on the bottom of the controller.



17. Making sure the nuts are in the back on the controller, line up holes and insert both bolts. Tighten securely.



18. If you ordered the 11"x19" Black molded tray, place tray on the floor upside down as shown. The longer tray arm will go on the right side, the short arm on the left side.



19A. Remove the four nuts from the mounting bolts on the arms and discard, do not remove the acorn nut and bolt.

19B. With the acorn nut facing up, place the longer arm on the right side of the tray, line up the two mounting holes. Insert bolt, and tighten snug.





20A. Place the second bolt into the hole.

20B. Using an allen wrench tighten both bolts securely.


With the acorn nut facing up, place the shorter arm on the left side of the tray and repeat steps 18-19.






21A. For the tray, remove the nut from the bolt on the tray arm and discard the nut. Make sure all other hardware stays on the bolt.

21B. Place the ratchet handle onto the bolt and tighten securely. Repeat steps for the other side.





22. If you ordered the optional Shadow Tray, loosen the ratchet handles on the side of the tray, flip the arms up so they are lined up with the tray as shown and tighten the ratchet handles. Insert the two tray arms into the tray bracket on the bottom of the tray. One of the arms is longer than the other for easier installation (for information on Shadow Tray adjustments see the Instructions for Use Manual). The bolts on the arms are used as a stop for future reference. Place the quick release pins into the holes of the tray to secure into place.



23. For the Swing-Away Shadow Tray, the knobs are located in the bag your manual came in, Place knobs onto unit as shown, insert tray bracket and tighten securely.



Caution: After placing the tray into position, ensure the ratchet handles on the side of the tray are tightened securely.



24A. If not already on the unit, remove the knob from the center post and place the back onto the unit as shown.

24B. Place the back in the desired position. Insert knob and tighten securely.






25A. If the optional dual lift control was ordered, insert bolt into push handle as shown and line up dual controller. Screw the bolt into the dual controller, tighten securely.

25B. If you ordered the optional headrest, insert the head support onto the unit and tighten securely.





26A. If you ordered the optional Elbow Pad Cutout, remove Chest Pad from tray. Disregard bolts, replace bolts with bolts in the bag with the Elbow Pad Cutout. Place Elbow Pad Cutout onto the tray. Line up Chest Pad bracket with holes, insert bolts into Tray and Elbow Pad Cutout. Tighten securely.



Mobile Option Assembly

Note: If this is an option added after the initial purchase, you must remove the existing front assembly before proceeding.

27. The Mobile option consists of two drive wheel assemblies, a "T" style front weldment, barrel nuts and bolts. You will need a 5mm allen wrench and a rubber hammer for assembly.



28. Set the Bantam on its back and attach the "T" weldment to the frame. Note that the front curves upward.



29. Line up holes and place the coved nuts on the bottom of the frame. You may have to tap them with a rubber hammer to make them flush. Tighten bolts securely.



30. Attach the interchangeable right and left drive wheel assemblies to the front frame.




31. Line up the holes and tap in the coved nuts and tighten bolts securely. Making sure the coved nuts are flush with the base. Position the Bantam upright and re-tighten the frame bolts.



Mobile Adjustment & Usage

32. To lock or unlock the drive wheels, turn the drive wheel lock one quarter turn.

Use the push rim adjustment to position the push rims forward or aft, for transferring or self-propulsion. Tighten to lock in position.



Options & Parts Detail



ITEM NO.	PART NO.	NAME PEDIATRIC	ITEM NO.	PART NO.	SLIP COVER SEAT COMPY SMALL FOOT PLATE STANDARD SM. SLIP COVER SEAT COMPY SMALL FOOT PLATE STANDARD FOOT PLATE STANDARD FOOT HOLDERS 7. 8. W.W. SWINGE SANDAM SWILL STANDARD STANDARD SWINGE SANDAM SWILL STANDARD STANDARD SWILL STANDARD STANDARD STANDARD ASMBLY SEAT STANDARD STANDARD ASMBLY SEAT STANDARD SHEET STANDARD SHEET SWILL STANDARD SHEET SWILL SW
1	150000	ASMBLY FRAME PEDIATRIC	69 70 71 72 73 74 75 76	130084	SLIP COVER SEAT STANDARD SM
2	150016	ASWRLY NO-TABLE FRONT	70	130085	SLIP COVERS SEAT COMFY SMALL
3	150018	ASMBLY GAS SPRING PEDIATRIC	71	150250	FOOT PLATE STANDARD
4	T50020	ASMBLY HYDRAULIC LIFT PEDIATRIC	72	T50252	FOOTPLATE MULTI-ADJUST
5	T50022	ASMBLY ELECTRIC LIFT BANTAM	73	T50232	NON SUPINE ASSEMBLY
6	T50100	BACK REST ASMBLY XS	74	T50254	FOOT HOLDERS 6"L X 3"W
7	T50102	ASMBLY BACK REST SMALL	75	T50256	FOOT HOLDERS 7.75"L X 3.25"W
- 8	NG50328	HANDLE PUMP REMOVEABLE/ADJ	76	T50258	FOOT HOLDERS 9.75"L X 4"W
9	NG50260	HANDLE STANDARD TOP		T50260	FOOT HOLDERS 11.75"L X 5"W
10	NG50044	QUAD GRIP OPTION	78	T50262	KNEE STANDARD BANTAM
11	NG50070	ACTUATOR HANDLE EXTENSION EVOLV LG	79	T50264	SWING-AWAY KNEES BANTAM
12	T50042	ASMBLY SEAT STANDARD XS	80	T50266	KNEE PADS 2.5"
13	T50044	ASMBLY SEAT FORM TO FIT XS	81	T50268	KNEE PAD 3.25"
14	T50046	ASMBLY SEAT STANDARD SM	82	T50270	KNEE PADS 4.25"
15 16 17	T50048	ASMBLY UPHOLSTRY COMFY SEAT SM	83	T50272	KNEE PADS 5"
16	T50050	ASMBLY BACK REST STANDARD XS	84	T50278	ASMBLY KNEE PAD SOFT MPS
	T50052	ASMBLY UPHOLSTRY FORM TO FIT BACK XS	85	T50248	ASMBLY LATERAL GUIDES PED
18	T50054	ASMBLY BACK REST STANDARD SM	86	T50246	MOBILE TABLE BANTAM
	T50056	ASMBLY UPHOLSTRY COMFY BACK SM	87	T50014	ASMBLY SHADOW SUPPORT TRAY PED
20	T50080	ASMBLY FOOT STRAP PED	88	130093	PADDED SLIP COVER LARGE TRAY
21	T50082	ASMBLY FOOT STRAP SECURE PED	78 79 80 81 82 83 84 85 86 87 88 89	T50238	BACK REST HIGH 15"-17"H
22	T50074	ASMBLY TABLE STANDARD PEDIATRIC	90	T50240	ASMBLY UPHOLSTRY FORM TO FIT BACK HIGH X
23	T50076	ASMBLY TABLE CLEAR PEDIATRIC	91	T50242	ASMBLY BACK REST STANDARD HIGH SM
24	NG50042	SUPPORT GRIP OPTION	92	T50244	ASMBLY UPHOLSTRY COMFY BACK SM
20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39	T30066	POSITIONING BELT ADJUSTABLE 34.5 - 44.5"	91 92 93 94 95 96 97 98 99 100 101 102 103 104 105 106 109	TOO BA T	SLIP COVER BACK HIGH XS
26	T50007	ASMBLY HIP GUIDES PEDIATRIC	94	†30090	SLIP COVER BACK COMEY HIGH XS
27	T50098	ASMRIY HIP GUIDES XS	95	T30091	SLIP COVER BACK HIGH SM
28	T50008	ASMRIY LATERAL GUIDES PED	96	T30092	SUP COVER BACK COMEY HIGH SM
29	T50086	X-STYLE CHEST VEST 9 5"L X 9"W	97	T50282	NO TRAY HANDLE SUPPORT
30	T50088	X-STYLE CHEST VEST 11"LX 9 5"W	98	T50284	ASMRIY HEAD REST FORM TO FIT
31	80809	TOOL POLICH	óŏ	V5434	ASMRIY FOOT STRAP 15"I
32	80246	SEAT ANGLE LOCATOR	100	Y5638	ASMRIY FOOT STRAP SECURE 15"I
33	T50128	ASMRI V HIGH MOUNT CHEST VEST RRKT	101	T10//37	RPACKET CONTROLLER
34	T50116	A SAARI V SWIVEL CASTED RANTAAA	102	NADOAT	A SAARI V HEAD PEST SAA
35	150117	MACRILE OPTION RANTAM TALL	103	T50064	A SAARI V HEAD REST YS
34	T50154	ASSEMBLY FIROW PAD 9 25" CUTOUT	104	VOCUAL	STIPINE OPTION W/MECHIOCK BYPASS
37	150130	ASSEMBLY FLROW PAD 11" CUTOUT	105	T50207	A SAARLY RACK PEST RPACKET LOW
38	NG50499	ASSEMBLY REARING SEAT DEPTH	106	T50298	ASMRIY BACK REST BRACKET HIGH
30	T30040	HPHOLSTRY SEAT STANDARD SAA	107	150270	ASSIST HANDLE SMALL RANTAM
70	T30041	IIPHOISTRY SEAT COMEY SMAIL	100	150300	NON STRETCH V STVIE CHEST VEST OF STILL OF THE
71	T30058	SEAT COVER STANDARD YS	100	TE0304	NON-STRETCH Y-STYLE CHEST VEST 11"L V 9 5"M
71	130020	LIBHOLSTRY SEAT COMMEN VS	110	TE0274	A CAADI VI ATERAL CHIDES DED
7/3	130037	PAD EPONT RANTAM	111	T50274	ASMRIVIATERAL GUIDES PED
77	A 5 4 1 4	A SAADLY CAS SPRING LOCK OUT		130270	ASMIDET EATERAL GOIDES LED
46	TE0228	A SAARI V SHADOW SIIDDODT TRAV DED	-		
44	T50220	HANDLE ASSEMBLY STIDING	-		
47	TE0230	HANDLE ASSEMBLY NON SIDINE	-		
7/8	T50234	STIPINE OPTION SMALL RANTAMA	-		
78	T50234	HAND ACHATOP ASSEMBLY	+		
50	T50038	A SAMPLY CHEST PAD MOUNT STANDARD	-		
51	A 5400	A CAADI Y TO A Y CIMING A WAY AADS	+		
51	A5402	A CAADLY TO A V CIMINIC A WAY CLEAD AADS	+		
52	T60204	TABLE STANDARD 11"LV 10"M	+		
23	T50204	IADLE SIANDARD II L & IY W	+		
24	120210	LATERALS W/ELDOW STOP /A DAA DEST O'' 12"	4		
25	120218	LATERALS W/ELDOW STOP/ARM REST 8 - 12	+		
20	150220	CLBOW STOP W/ARM REST	-		
2/	A2004	ASMOLI FOREARM WINGS MPS	+		
20	A2000	ASMOLT FOREARM WINGS CLEAR MPS	-		
29	A3035	SLIP COVER HEAD REST ("H V 10"H)	-		
90	A3036	SLIF COVER HEAD REST OF A TO SIT	-		
21	A3037	DADDED SUB COVER TRAVACE	4		
92	A3038	FADDED SLIP COVER IKAT MPS	-		
	130078	SLIP COVER BACK 11"-13"H	4		
0.3					
64	T30079	SLIP COVER BACK COMPT 15 - 17 H			
64 65	T30079 T30080	SLIP COVER BACK STANDARD 14"-16"H			
64 65 66	T30079 T30080 T30081	SLIP COVER BACK STANDARD 14"-16"H			
41 42 43 44 45 46 47 48 49 51 52 55 55 55 56 61 62 64 64 66 66 68	5000 6 1 1 1 1 1 1 1 1 1	ASMBLY FRAME PEDIATRIC ASMBLY FRAME PEDIATRIC ASMBLY CAS SPRING PEDIATRI			

Altimate Medical

Assembly Manual

262 West 1st St.

Morton, MN 56270 USA

Toll Free: 800.342.8968 or 507.697.6393 Fax Free: 877.342.8968 or 507.697.6900

email: info@easystand.com

easystand.com

EC REP

Medical Product Service GmbH Borngasse 20 35619 Braunfels Deutschland

UK REP

MPS Medical Product Service UK Ltd
Northgate House
Northgate Street
Devizes
Wiltshire England SN10 1JX

CH REP

MPS Medical Product Service Switzerland, CO/Accumed Sagl
Morbio Inferiore
Viale Serfontana 10
CH-6834 Switzerland



